

SPECTRUM REPORT

(UMTS)

Applicant: Shenzhen Huafurui Technology Co., Ltd.
Address of Applicant: Unit 1401 & 1402, 14/F, Jinqi zhigu mansion (No. 4 building of Chongwen Garden), Crossing of the Liuxian street and Tangling road, Taoyuan street, Nanshan district, Shenzhen, P.R. China

Equipment Under Test (EUT)

Product Name: Smartphone
Model No.: K30
Trade mark: HAFURY
Applicable standards: ETSI EN 301 908-1 V11.1.1 (2016-07)
ETSI EN 301 908-2 V11.1.2 (2017-08)

Date of sample receipt: 09 Apr., 2020

Date of Test: 09 Apr., to 22 Apr., 2020

Date of report issued: 16 Jun., 2020

Test Result: PASS*

*In the configuration tested, the EUT complied with the standards specified above.

The CE mark as shown below can be used, under the responsibility of the manufacturer, after completion of an EC Declaration of Conformity and compliance with all relevant EC Directives. The protection requirements with respect to electromagnetic compatibility contained in Directive 2014/53/EU are considered.



Bruce Zhang
Laboratory Manager



This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	16 Jun., 2020	Original

Remark: This report was revised by CCISE200402406 report, which was released and tested by Shenzhen Zhongjian Nanfang Testing Co., Ltd. The differences between them as below: Update model, product name, trademark and software version. So no needs to be retested.

Tested by:

YT Yang
Test Engineer

Date:

16 Jun., 2020

Reviewed by:

Winner Zhang
Project Engineer

Date:

16 Jun., 2020

3 Contents

Page

1	COVER PAGE.....	1
2	VERSION.....	2
3	CONTENTS	3
4	TEST SUMMARY	4
5	GENERAL INFORMATION	5
5.1	CLIENT INFORMATION	5
5.2	GENERAL DESCRIPTION OF E.U.T.	5
5.3	TEST ENVIRONMENT AND MODE.....	6
5.4	DESCRIPTION OF SUPPORT UNITS.....	6
5.5	MEASUREMENT UNCERTAINTY	6
5.6	LABORATORY FACILITY	6
5.7	LABORATORY LOCATION	6
5.8	TEST INSTRUMENTS LIST.....	7
6	RADIO TECHNICAL REQUIREMENTS SPECIFICATION IN ETSI EN 301 908-1/-2.....	8
6.1	JUSTIFICATION.....	8
6.2	TEST CONFIGURATION OF EUT	8
6.3	TEST SETUP BLOCK.....	9
6.4	TEST RESULTS	10
6.4.1	TEST RESULT SUMMARY	10
6.4.2	RECEIVER BLOCKING CHARACTERISTICS	11
6.4.3	RECEIVER SPURIOUS RESPONSE	11
6.4.4	OUT-OF-SYNCHRONIZATION HANDLING OF OUTPUT POWER	12
6.4.5	RADIATED SPURIOUS EMISSIONS	13
6.4.6	CONTROL AND MONITORING FUNCTIONS	14
7	TEST SETUP PHOTO.....	15
8	EUT CONSTRUCTIONAL DETAILS.....	16

4 Test Summary

Test Item	Test Requirement	Test method	Result
Transmitter maximum output power	ETSI EN 301 908-2 section 4.2.2	ETSI EN 301 908-2 section 5.3.1	Pass
Transmitter spectrum emission mask	ETSI EN 301 908-2 section 4.2.3	ETSI EN 301 908-2 section 5.3.2	Pass
Transmitter spurious emissions	ETSI EN 301 908-2 section 4.2.4	ETSI EN 301 908-2 section 5.3.3	Pass
Transmitter minimum output power	ETSI EN 301 908-2 section 4.2.5	ETSI EN 301 908-2 section 5.3.4	Pass
Transmitter Adjacent Channel Leakage Power Ratio (ACLR)	ETSI EN 301 908-2 section 4.2.12	ETSI EN 301 908-2 section 5.3.11	Pass
Out-of-synchronization handling of output power	ETSI EN 301 908-2 section 4.2.11	ETSI EN 301 908-2 section 5.3.10	Pass
Receiver adjacent channel selectivity (ACS)	ETSI EN 301 908-2 section 4.2.6	ETSI EN 301 908-2 section 5.3.5	Pass
Receiver blocking characteristics	ETSI EN 301 908-2 section 4.2.7	ETSI EN 301 908-2 section 5.3.6	Pass
Receiver spurious response	ETSI EN 301 908-2 section 4.2.8	ETSI EN 301 908-2 section 5.3.7	Pass
Receiver intermodulation characteristics	ETSI EN 301 908-2 section 4.2.9	ETSI EN 301 908-2 section 5.3.8	Pass
Receiver spurious emissions	ETSI EN 301 908-2 section 4.2.10	ETSI EN 301 908-2 section 5.3.9	Pass
Receiver Reference Sensitivity level	ETSI EN 301 908-2 section 4.2.13	ETSI EN 301 908-2 section 5.3.12	Pass
Radiated emissions	ETSI EN 301 908-1 Section 4.2.2	ETSI EN 301 908-1 Section 5.3.1	Pass
Control and monitoring functions	ETSI EN 301 908-1 Section 4.2.4	ETSI EN 301 908-1 Section 5.3.3	Pass
Remark: Pass: The EUT complies with the essential requirements in the standard.			

5 General Information

5.1 Client Information

Applicant:	Shenzhen Huafului Technology Co., Ltd.
Address:	Unit 1401 & 1402, 14/F, Jinqi zhigu mansion (No. 4 building of Chongwen Garden), Crossing of the Liuxian street and Tangling road, Taoyuan street, Nanshan district, Shenzhen, P.R. China
Manufacturer/ Factory:	Shenzhen Huafului Technology Co., Ltd.
Address:	Unit 1401 & 1402, 14/F, Jinqi zhigu mansion (No. 4 building of Chongwen Garden), Crossing of the Liuxian street and Tangling road, Taoyuan street, Nanshan district, Shenzhen, P.R. China

5.2 General Description of E.U.T.

Product Name:	Smartphone
Model No.:	K30
Transmitter frequency range:	Band I: 1920 MHz~1980 MHz Band VIII: 880 MHz~915 MHz
Receiver frequency range:	Band I: 2110 MHz~2170 MHz Band VIII: 925 MHz~960 MHz
Hardware version:	TE626_MAIN_PCB_V1.0
Software version:	HAFURY_K30_A011CH_V01_20200615
Modulation type:	WCDMA: QPSK ; HSDPA: QPSK,16QAM; HSUPA: QPSK
Antenna Type:	Internal Antenna
Antenna Gain:	Band I: -0.75 dBi (declare by Applicant) Band VIII: -0.80 dBi (declare by Applicant)
Power supply:	Rechargeable Li-ion polymer Battery DC3.85V/4200mAh
AC adapter:	Model No.: HJ-0501500W2-EU Input: AC100-240V, 50/60Hz 0.3A Output: DC 5.0V, 1.5A

5.3 Test environment and mode

Operating Environment:	
Temperature:	Normal: 15°C ~ 35°C, Extreme: -20°C ~ +55°C
Humidity:	20 % ~ 75 % RH
Atmospheric Pressure:	1008 mbar
Voltage:	Nominal: 3.85Vdc, Extreme: Low 3.5Vdc, High 4.40Vdc
Test mode:	
RMC mode	Keep the EUT communication with simulated station in RMC mode
HSDPA mode	Keep the EUT communication with simulated station in HSDPA mode
HSUPA mode	Keep the EUT communication with simulated station in HSUPA mode
Note: 1. All the test environments and test modes required following ETSI TS 134 121-1 and ETSI EN 301 908-2. 2. During the test, pre-scan SIM 1 and SIM 2, found SIM 1 was worse case. The report only reflects the worst case.	

5.4 Description of Support Units

Test Equipment	Manufacturer	Model No.	Serial No.
Simulated Station	Anritsu	MT8820C	6201026545
Simulated Station	Rohde & Schwarz	CMU200	122477

5.5 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%)
Radio Frequency	$\pm 1.2 \times 10^{-9}$
RF Power, Conducted	± 0.64 dB
Spurious emission, Conducted	± 1.18 dB
Temperature	± 0.3 °C
Voltage	± 0.1 %
Humidity	± 2 %
Time	± 10 %
Radiated Emission (30MHz ~ 1000MHz)	± 4.32 dB
Radiated Emission (1GHz ~ 18GHz)	± 5.38 dB

5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.

- **ISED – CAB identifier.: CN0021**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

5.7 Laboratory Location

Shenzhen ZhongjianNanfang Testing Co.,Ltd.

Address: No.110~116, Building B, Jinyuan Business Building, Xixiang Road, Bao'an District, Shenzhen, Guangdong, China

Tel: +86-755-23118282, Fax:+86-755-23116366

Email: info@ccis-cb.com, Website: <http://www.ccis-cb.com>

5.8 Test Instruments list

Radiated Emission:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	SAEMC	9m*6m*6m	966	07-22-2017	07-21-2020
BiConiLog Antenna	SCHWARZBECK	VULB9163	497	03-18-2020	03-17-2021
Biconical Antenna	SCHWARZBECK	VUBA9117	359	06-22-2017	06-21-2020
Horn Antenna	SCHWARZBECK	BBHA9120D	916	03-18-2020	03-17-2021
Horn Antenna	SCHWARZBECK	BBHA9120D	1805	06-22-2017	06-21-2020
EMI Test Software	AUDIX	E3	Version: 6.110919b		
Pre-amplifier	HP	8447D	2944A09358	03-18-2020	03-17-2021
Pre-amplifier	CD	PAP-1G18	11804	03-18-2020	03-17-2021
Spectrum analyzer	Rohde & Schwarz	FSP30	101454	03-18-2020	03-17-2021
EMI Test Receiver	Rohde & Schwarz	ESRP7	101070	03-18-2020	03-17-2021
Signal Generator	Rohde & Schwarz	SMX	835454/016	03-18-2020	03-17-2021
Signal Generator	Rohde & Schwarz	SMR20	1008100050	03-18-2020	03-17-2021
Cable	ZDECL	Z108-NJ-NJ-81	1608458	03-18-2020	03-17-2021
Cable	MICRO-COAX	MFR64639	K10742-5	03-18-2020	03-17-2021
Cable	SUHNER	SUCOFLEX100	58193/4PE	03-18-2020	03-17-2021
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		

Conducted method:					
Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
Spectrum Analyzer	Agilent	N9020A	MY50510123	11-18-2019	11-17-2020
Vector Signal Generator	Agilent	N5182A	MY49060014	11-18-2019	11-17-2020
Signal Generator	Rohde & Schwarz	SMR20	1008100050	03-18-2020	03-17-2021
Simulated Station	Rohde & Schwarz	CMW500	140493	07-22-2019	07-21-2020
RF Switch Unit	MWRFTTEST	MW200	N/A	N/A	N/A
Test Software	MWRFTTEST	MTS8200	Version: 2.0.0.0		
DC Power Supply	XinNuoEr	WYK-10020K	1409050110020	09-25-2019	09-24-2020
Temperature Humidity Chamber	HengPu	HPGDS-500	20140828008	11-01-2019	10-31-2020

6 Radio Technical Requirements Specification in ETSI EN 301 908-1/-2

6.1 Justification

The EUT and test equipment were configured for testing according to ETSI EN 301 908-2 V11.1.1 (2016-07) and ETSI TS 134 121-1.

The EUT was tested in the normal operating mode to represent worst-case results during the final qualification test.

The EUT was tested with a dummy battery.

6.2 Test Configuration of EUT


WCDMA Band I			WCDMA Band VIII		
Channel Number		Frequency (MHz)	Channel Number		Frequency (MHz)
Low channel	9612	1922.4	Low channel	2712	882.4
Middle channel	9750	1950.0	Middle channel	2788	897.6
High channel	9888	1977.6	High channel	2863	912.6

Clause No.	Test Conditions					Test Channel			Test Modes		
	NTNV	LTLV	LTHV	HTLV	HTHV	Low	Middle	High	RMC	HSDPA	HSUPA
4.2.2	√	√	√	√	√	√	√	√	√	√	√
4.2.3	√					√	√	√	√	√	√
4.2.4	√					√	√	√	√		
4.2.5	√	√	√	√	√		√		√		
4.2.6	√						√		√		
4.2.7	√						√		√		
4.2.8	√						√		√		
4.2.9	√						√		√		
4.2.10	√						√		√		
4.2.11	√						√		√		
4.2.12	√	√	√	√	√	√	√	√	√	√	√
4.2.13	√	√	√	√	√	√	√	√	√		

Note:

1. "√" means that this configuration is chosen for test.
2. "NTNV" means Normal Temperature Normal Voltage, "LTLV" means Low Temperature Low Voltage, "LTHV" means Low Temperature High Voltage, "HTLV" means High Temperature Low Voltage, "HTHV" means High Temperature High Voltage.

6.3 Test Setup Block

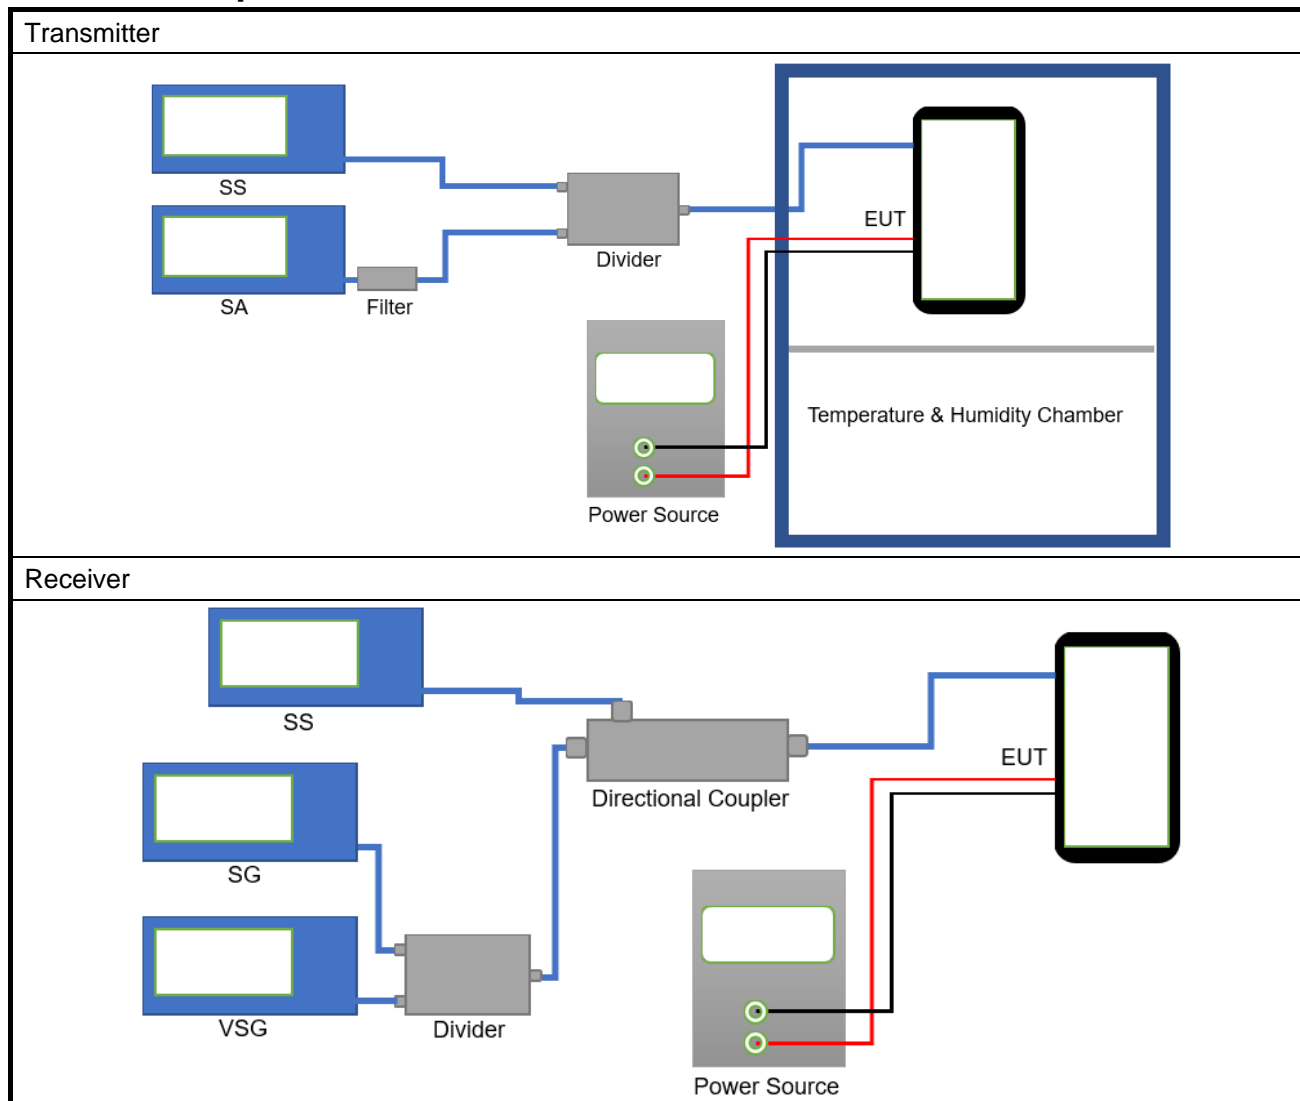

6.4 Test Results

6.4.1 Test Result Summary

Clause No.	Test Mode	Test Condition	Test Band	
			WCDMA Band I, VIII	
			Test Data	Verdict
Requirements in EN 301 908-2				
4.2.2	RMC	NTNV	Appendix A - WCDMA - NTVN	Pass
		LTLV	Appendix B - WCDMA - LTLV	Pass
		LTHV	Appendix C - WCDMA - LTHV	Pass
		HTLV	Appendix D - WCDMA - HTLV	Pass
		HTHV	Appendix E - WCDMA - HTHV	Pass
4.2.3	RMC	NTNV	Appendix A - WCDMA - NTVN	Pass
	HSDPA	NTNV	Appendix A - WCDMA - NTVN	Pass
	HSUPA	NTNV	Appendix A - WCDMA - NTVN	Pass
4.2.4	RMC	NTNV	Appendix A - WCDMA - NTVN	Pass
4.2.5	RMC	NTNV	Appendix A - WCDMA - NTVN	Pass
		LTLV	Appendix B - WCDMA - LTLV	Pass
		LTHV	Appendix C - WCDMA - LTHV	Pass
		HTLV	Appendix D - WCDMA - HTLV	Pass
		HTHV	Appendix E - WCDMA - HTHV	Pass
4.2.6	RMC	NTNV	Appendix A - WCDMA - NTVN	Pass
4.2.7	RMC	NTNV	See Section 6.4.2	Pass
4.2.8	RMC	NTNV	See Section 6.4.3	Pass
4.2.9	RMC	NTNV	Appendix A - WCDMA - NTVN	Pass
4.2.10	RMC	NTNV	Appendix A - WCDMA - NTVN	Pass
4.2.11	RMC	NTNV	See Section 6.4.4	Pass
4.2.12	RMC	NTNV	Appendix A - WCDMA - NTVN	Pass
		LTLV	Appendix B - WCDMA - LTLV	Pass
		LTHV	Appendix C - WCDMA - LTHV	Pass
		HTLV	Appendix D - WCDMA - HTLV	Pass
		HTHV	Appendix E - WCDMA - HTHV	Pass
	HSDPA	NTNV	Appendix A - WCDMA - NTVN	Pass
		LTLV	Appendix B - WCDMA - LTLV	Pass
		LTHV	Appendix C - WCDMA - LTHV	Pass
		HTLV	Appendix D - WCDMA - HTLV	Pass
		HTHV	Appendix E - WCDMA - HTHV	Pass
	HSUPA	NTNV	Appendix A - WCDMA - NTVN	Pass
		LTLV	Appendix B - WCDMA - LTLV	Pass
		LTHV	Appendix C - WCDMA - LTHV	Pass
		HTLV	Appendix D - WCDMA - HTLV	Pass
		HTHV	Appendix E - WCDMA - HTHV	Pass
4.2.13	RMC	NTNV	Appendix A - WCDMA - NTVN	Pass
		LTLV	Appendix B - WCDMA - LTLV	Pass
		LTHV	Appendix C - WCDMA - LTHV	Pass
		HTLV	Appendix D - WCDMA - HTLV	Pass
		HTHV	Appendix E - WCDMA - HTHV	Pass
Requirements in EN 301 908-1				
4.2.2	RMC	NTNV	See Section 6.4.5	Pass
4.2.4	RMC	NTNV	See Section 6.4.6	Pass
Note: “NTNV” means Normal Temperature Normal Voltage, “LTLV” means Low Temperature Low Voltage, “LTHV” means Low Temperature High Voltage, “HTLV” means High Temperature Low Voltage, “HTHV” means High Temperature High Voltage.				

6.4.2 Receiver blocking characteristics

WCDMA 900:

ACS	BER	Limit	Result
Offset -5MHz	0%	0.01%	Pass
Offset 5MHz	0%	0.01%	

WCDMA 2100:

ACS	BER	Limit	Result
Offset -5MHz	0%	0.01%	Pass
Offset 5MHz	0%	0.01%	

6.4.3 Receiver spurious response

WCDMA 900:


ACS	BER	Limit	Result
Offset -5MHz	0%	0.01%	Pass
Offset 5MHz	0%	0.01%	

WCDMA 2100:

ACS	BER	Limit	Result
Offset -5MHz	0%	0.01%	Pass
Offset 5MHz	0%	0.01%	


6.4.4 Out-of-synchronization handling of output power

The Middle channel-WCDMA 900

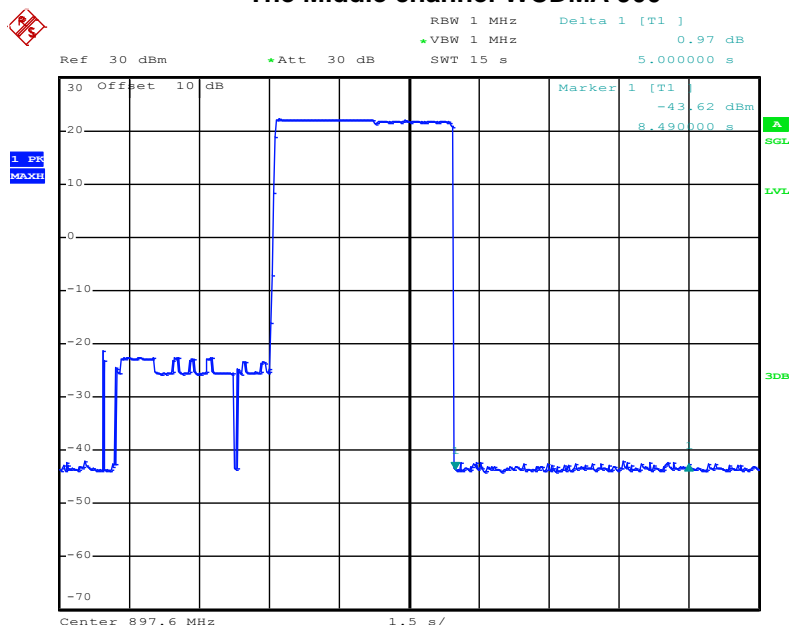

Date: 18.APR.2020 14:53:05

The Middle channel- WCDMA 2100

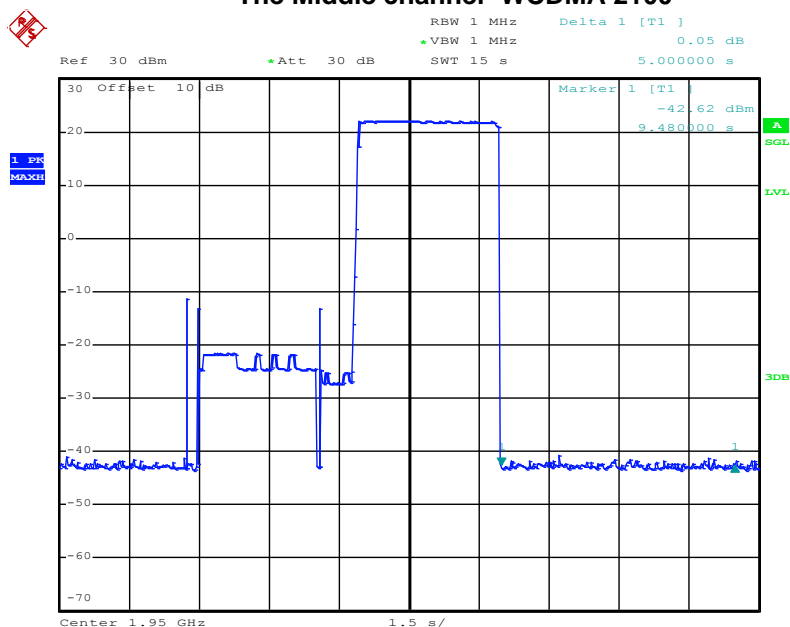


Date: 18.APR.2020 14:41:15

6.4.5 Radiated spurious emissions


The Middle channel-WCDMA 2100 mode-Traffic mode				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
30.32	Vertical	-67.25	-36 dBm below 1GHz, -30 dBm above 1GHz.	Pass
52.03	V	-65.92		
1795.20	V	-49.57		
2692.80	V	-50.50		
193.10	Horizontal	-69.60		
259.23	H	-70.44		
1795.20	H	-54.18		
2692.80	H	-49.03		
The Middle channel-WCDMA 2100 mode-Idle mode				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
30.32	Vertical	-68.25	-57dBm below 1GHz, -47dBm above 1GHz.	Pass
52.03	V	-67.34		
1795.20	V	-48.25		
2692.80	V	-49.32		
193.10	Horizontal	-66.26		
259.23	H	-64.15		
1795.20	H	-53.25		
2692.80	H	-48.79		

The Middle channel- WCDMA 900 mode- Traffic mode				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
30.32	Vertical	-69.60	-36 dBm below 1GHz, -30 dBm above 1GHz.	Pass
52.03	V	-70.25		
3900.00	V	-46.25		
5850.00	V	-42.82		
193.10	Horizontal	-68.26		
259.23	H	-67.34		
3900.00	H	-46.21		
5850.00	H	-43.56		
The Middle channel- WCDMA 900 mode - Idle mode				
Frequency (MHz)	Spurious Emission		Limit (dBm)	Test Result
	polarization	Level(dBm)		
30.32	Vertical	-67.26	-57Bm below 1GHz, -47Bm above 1GHz.	Pass
52.03	V	-68.26		
3900.00	V	-47.25		
5850.00	V	-41.98		
193.10	Horizontal	-66.43		
259.23	H	-65.19		
3900.00	H	-45.31		
5850.00	H	-42.79		

6.4.6 Control and monitoring functions

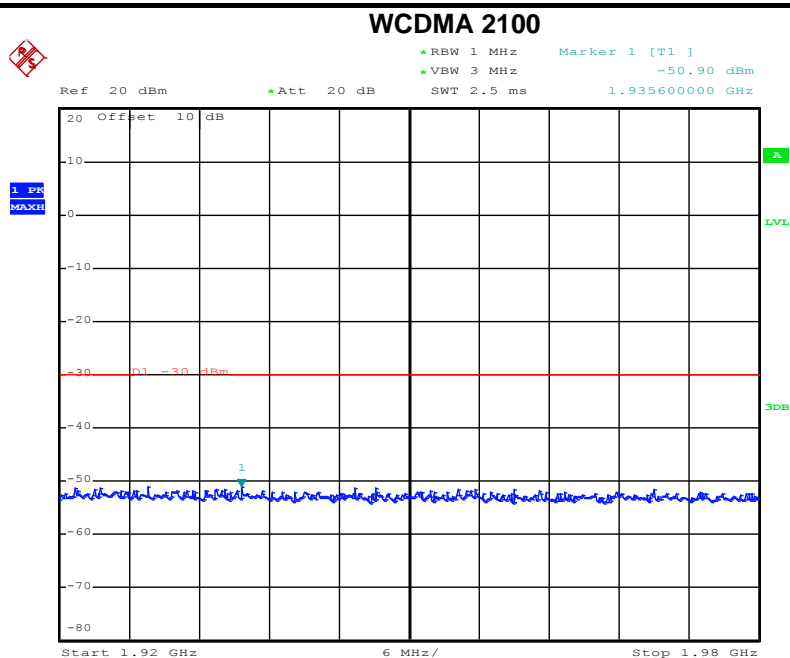


Date: 18.APR.2020 14:52:20

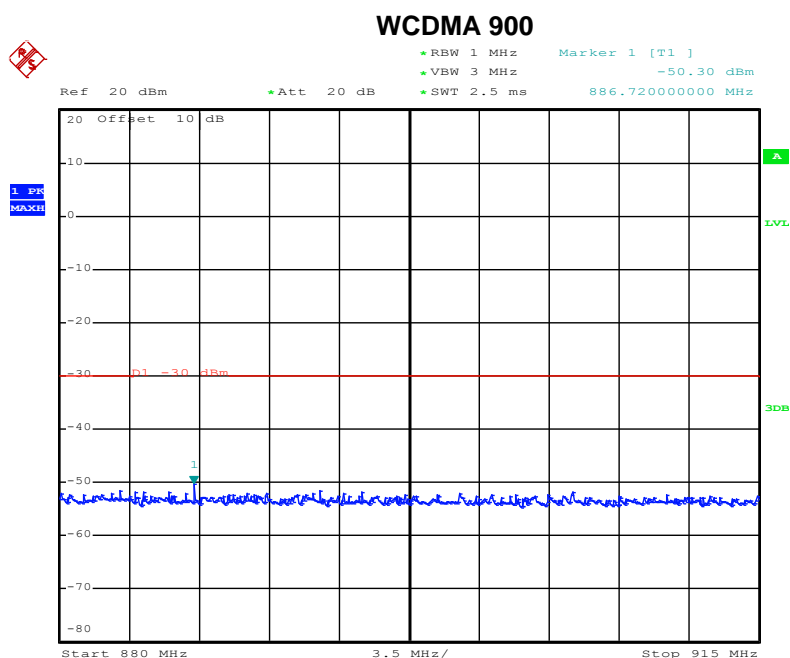


Date: 18.APR.2020 14:47:37

7 Test Setup Photo

Radiated Spurious Emission
Below 1GHz

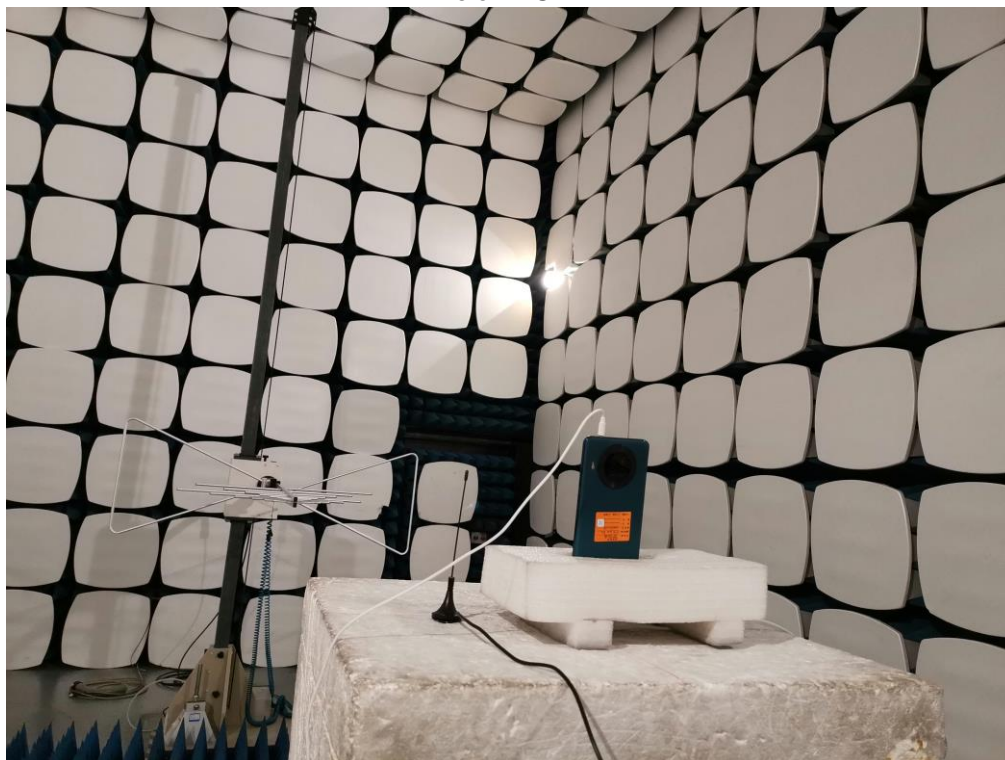

Above 1GHz

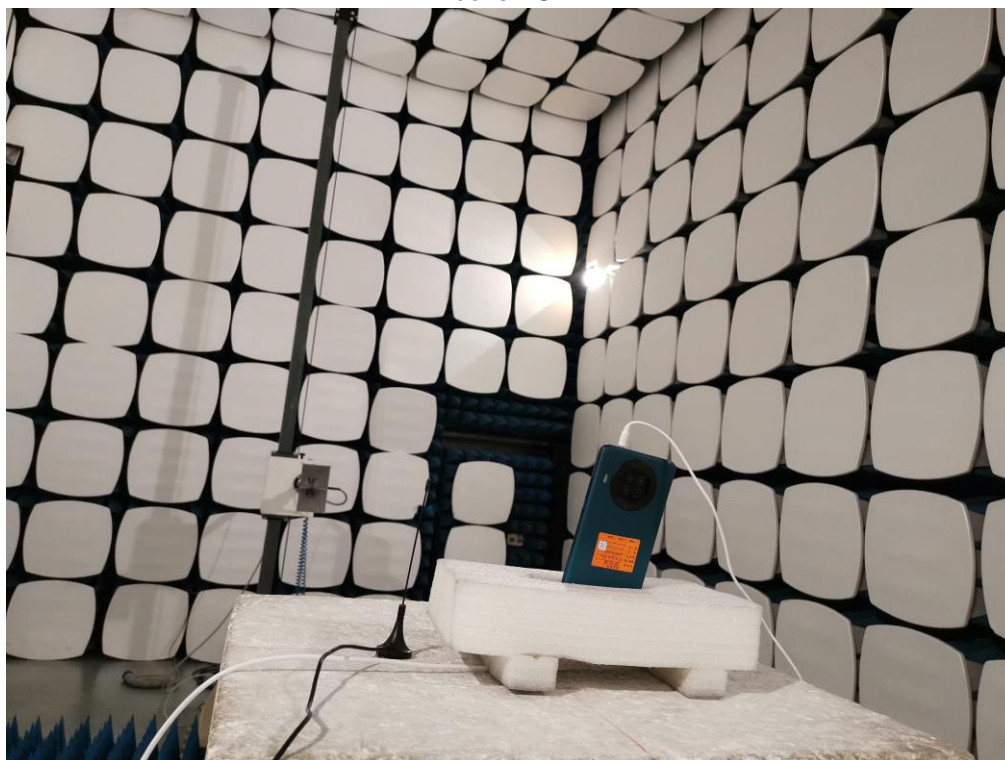

8 EUT Constructional Details

Reference to the test report No. CCISE200603701

----- End of report -----